
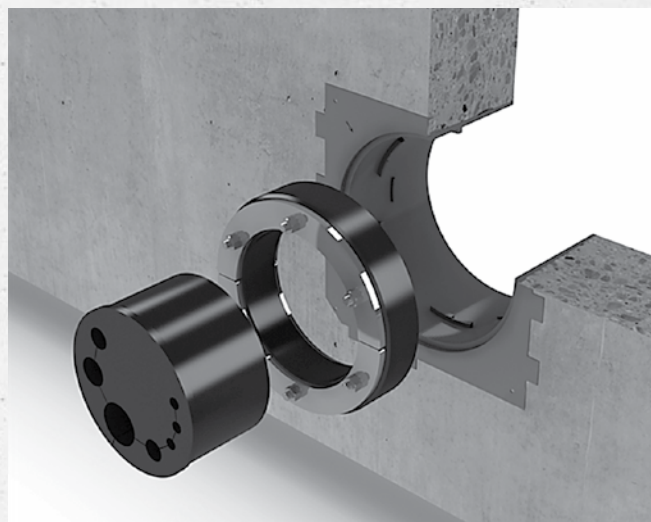


UGA BKD 150 system insert

 **PRESSING WATER**

- Use in existing flange sleeves and on-wall flange sealing collars on the connection side
- With anti-slip protection
- With replaceable interchangeable or onion ring insert



PRODUCT ADVANTAGES

- Easy installation
- Split version for installing after cables have been laid
- With bayonet catch mechanism to ensure that insert does not slip
- Interchangeable insert custom-made for your application
- Can also be used as plugged insert

TECHNICAL DETAILS

- All metal parts made of stainless steel 1.4301 (V2A), optionally also stainless steel 1.4571/1.4404 (V4A)
- Split version
- Leak-tight against gas and pressing water

PRODUCT SCOPE

- BKD 150 system insert 34 mm (gasket insert) made of EPDM
- Interchangeable insert 60 mm or onion ring insert 40 mm made of EPDM



System insert with interchangeable insert

Product	Examples for max. utilisation*
BKD150-E-WE/V2A/EPDM (Z)x(D)	3 × outer Ø 42 or 5 × outer Ø 34 or 9 × outer Ø 24

* Other combinations with different diameters are also possible.



System insert with onion ring insert

Product	Cables	Outer diameter of cable	Outer diameter of cable
BKD150-E-ZS/V2A/EPDM 3x(22-54)	3	22–54 mm	488 1 001 150 24
BKD150-E-ZS/V2A/EPDM 6x(4-32)	6	4–32 mm	488 1 002 150 24
BKD150-E-ZS/V2A/EPDM 9x(4-25)	9	4–25 mm	488 1 003 150 24
BKD150-E-ZS/V2A/EPDM 4x(4-32) 6x(4-20)	10	4 × 4–32 mm / 6 × 4–20 mm	488 1 004 150 24

Individual onion ring inserts (optional)

Product	Number of cables	Outer diameter of cable
ZS/G/40/EPDM 22-54	1	22–54 mm
ZS/G/40/EPDM 4-20	1	4–20 mm
ZS/G/40/EPDM 4-25	1	4–25 mm
ZS/G/40/EPDM 4-32	1	4–32 mm

The UGA range is excluded from the DOYMA 25-year warranty.