


Curaflex® 5000

NON-PRESSING WATER

- Cut-out for duct systems
- Use in **unfinished structures**
- For use with **tanking membranes or thick coating (black tank)**
- With **fixed and loose flange**
- For **high static load capacity**



25 years
guarantee

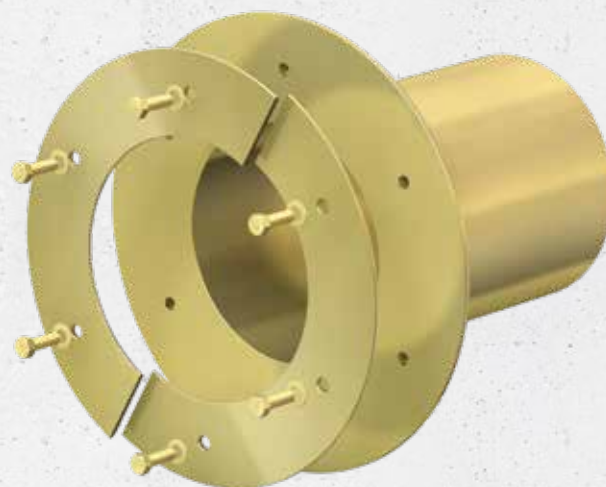

PRODUCT ADVANTAGES

- Optimally designed inner wall for holding the DOYMA sealing systems and building services duct system
- Steel pipe sleeve for high static loads with integrated fixed and loose flange (loose flange split)
- For flush mounting into the formwork

TECHNICAL DETAILS

- With fixed and loose flanges in accordance with DIN 18533
- Gas and watertight
- Radon proof – according to FHRK information sheet MB101
- Depending on the tanking membrane, installed with Curaflex® packings (1775) arranged on both sides where there is thin and hard film, or accessories where there is a thick coating (1776): sanding of the contact surfaces of the fixed/loose flange

MATERIAL

- GGV triple corrosion protection coating; optionally made of stainless steel 1.4301 (V2A) or 1.4571 / 1.4404 (V4A)
- Contact surfaces sanded where a thick coating is yet to be applied
- Delivery includes fixing material for solid walls



ACCESSORIES (OPTIONAL)*

- Curaflex® packings (1775) for thin, hard films
- Accessories for thick coating
- Punch for thick coating

* see accessories section

Inner diameter of pipe sleeve D_1 [DN in mm]	Outer diameter of fixed flange D_5 max. [mm]	Standard lengths L_1 [mm]
80	260	
100	280	
125	300	
150	330	
200	380	200
250	430	240
300	480	250
350	530	300
400	580	350
450	630	365
500	680	400
600	780	
700	880	

Further material combinations and dimensions available upon request.



Variant: Curaflex® 5000/U

