
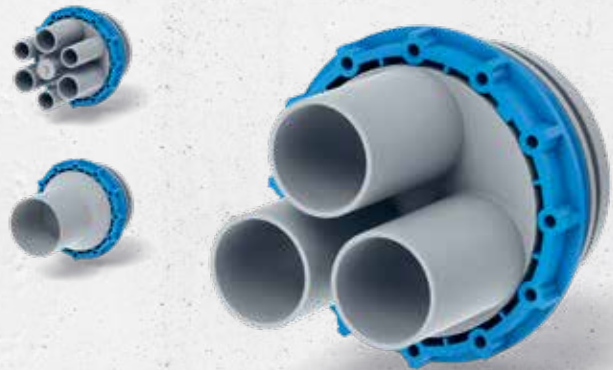


# UGA KD 110 system cover

With sockets and heat shrink sleeves

 PRESSING WATER

- Use in existing flange sleeves
- Sealing of media lines using shrink technology
- With screw closure



## PRODUCT ADVANTAGES

- Gas and watertight
- For routing media lines (cables or pipes) measuring 7–78 mm
- Sealing with heat or cold-shrink technology and system inserts
- Compatible with other established systems
- Made of environmentally friendly and chemically highly resistant materials

## System cap closed

Article	Number of cables	Article number
KD110-D	0	4 10 2 000 110 0 4

## System cap with heat shrink sleeve

Article	Number of cables	Outer diameter of pipe/cable	Article number
KD110-D-1/80-TM	1	26–78 mm	4 10 2 080 110 0 4
KD110-D-3/46(3/3)-TM	3	16–45 mm	4 10 2 046 110 0 4
KD110-D-7/32(3/3)/25(4/3)-TM*	7	4 × 7–24 mm / 3 × 7–31 mm	4 10 2 032 110 0 4

## System cap with cold shrink sleeve

Article	Number of cables	Outer diameter of pipe/cable
KD110-D-1/80-KS	1	33–79 mm
KD110-D-3/46(3/3)-KS	3	29–45 mm
KD110-D-7/32(3/3)/25(4/3)-KS*	7	4 × 14–24 mm / 3 × 19–31 mm

\* KD110-D7 includes one closed socket (25 mm) in the scope of delivery, which can be opened up as needed. The scope of delivery includes six shrink sleeves.

The UGA range is excluded from the DOYMA 25-year warranty.

