


Aquagard core bore sealant



25
Years
Guarantee

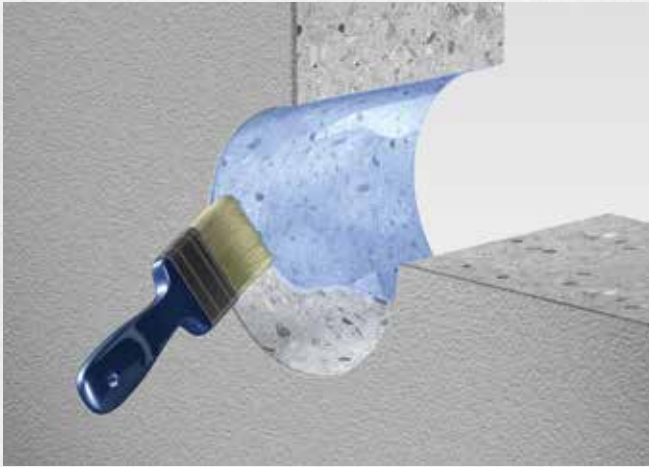

Delivery size 1 litre

Delivery size 1/3 litre

CONCRETE NEEDS PROTECTION!

Pre-cut reinforcement steel must be protected against corrosion. Moreover, concrete can absorb moisture up to a certain depth before absolute water impermeability occurs. This makes it possible for water to migrate around the gasket insert. Aquagard core bore sealant prevents this. Based on these findings, we recommend pre-treating the core bore with Aquagard.

THE SYSTEM CONSISTS OF

Aquagard primer (Curaflex® 1710/1711)

Base coat/primer for Aquagard special paint

The primer penetrates deep into the capillaries and air bubbles in the concrete and seals these so they are permanently watertight. This prevents water from getting into the gasket insert this way. The primer is applied with a brush or roller.

Aquagard special paint (Curaflex® 1715/1716)

Special paint for sealing core bores

Aquagard special paint seals the surface of the core bore wall and at the same time protects any pre-cut reinforcement steel from corrosion. The special paint is also applied with a brush or roller.

DELIVERY SIZES:

Aquagard preservation (large)

- Aquagard primer
1 litre for 4.0 m² (Curaflex® 1710)
- Aquagard special paint
1 litre for 3.5 m² (Curaflex® 1715)

Aquagard preservation (small)

- Aquagard primer
1/3 litre for 1.5 m² (Curaflex® 1711)
- Aquagard special paint
1/3 litre for 1.0 m² (Curaflex® 1716)

Aquagard	Primer	Special paint
Yield	3.5–4.0 m ² /litre	
Colour	Colourless	Dove grey
Drying time (room temp.)	Approx. 1 hour	Approx. 5–6 hours

Aquagard*	Article number
Aquagard primer (Curaflex® 1710). 1 litre for 4 m ²	1 99 0 710 000 0 0
Aquagard special paint (Curaflex® 1715). 1 litre for 3.5 m ²	1 99 0 715 000 0 0
Aquagard primer (Curaflex® 1711). 1/3 litre for 1.5 m ²	1 99 0 711 000 0 0
Aquagard special paint (Curaflex® 1716). 1/3 litre for 1 m ²	1 99 0 716 000 0 0

*Excluded from the 25-year DOYMA warranty.