


Adhesive, coating, cleaner, primer, sealing materials, accessories for Curaflex Nova®

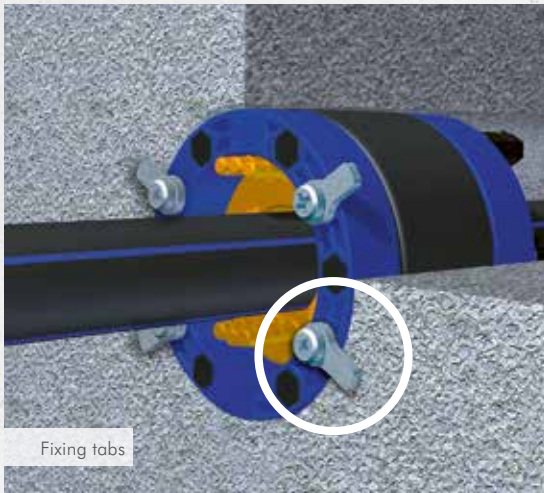

Accessories for Curaflex Nova® gasket inserts

Fixing set for Curaflex Nova® gasket inserts

Consisting of four fixing tabs with V2A screws.
Article no. 1 88 0 600 004 2 9

ITL nut set for Curaflex Nova® gasket inserts

Consisting of nine ITL nuts M6 for DN 80 to DN 250.
Article no. 1 88 0 600 009 0 0
Consisting of 12 ITL nuts M8 for DN 300.
Article no. 1 88 0 800 012 0 0

Accessories for pipe sleeves

Sikadur-31+ adhesive (1740)

Adhesive for bonding the split special fibre cement 3000 / T pipe sleeves. This adhesive also joins two special fibre cement pipe sleeves to an overlapping pipe section. 1.2 kg, sufficient for approx. 0.6 m²

2-component epoxy resin coating (1745)

Epoxy resin for coating the pipe sleeve inner surface, end face and core bore walls. High chemical resistance; seals against natural gas, city gas and liquefied petroleum gas, unleaded petrol, diesel and many others, gas-tight. 2.0 kg, sufficient for approx. 2.0 m²

Butyl sealing tape (1753)

Elastic sealing compound for sealing on existing thick coating.

Four fixing tabs with screws	Article number
	1 88 0 600 004 2 9
ITL nuts M8	Article number
12 items	1 88 0 800 012 0 0
ITL nuts M6	Article number
9 items	1 88 0 600 009 0 0

Sikadur-31+ adhesive*	Article number
Type 1740, 1.2 kg container for 0.6 m ²	1 99 0 740 000 0 0
2-component epoxy resin coating*	Article number
Type 1745	1 99 0 745 000 0 0
Butyl sealing tape*	Article number
Type 1753	—

*Excluded from the 25-year DOYMA warranty.





Sika adhesive cleaner-1 (1754)



Sika primer-3 N (1755)



Sikaflex-11FC sealing compound (1756)

Required accessories for split pipe sleeves and Curaflex® 8000

Sika adhesive cleaner-1 (1754)

Activator and cleaner of metallic substrates for better adhesion of the sealing compound Sikaflex-11FC⁺. 1 litre, sufficient for approx. 8.0 m²

Sika primer-3 N (1755)

Priming of concrete to improve the adhesion of Sikaflex-11FC⁺. 0.25 litres, sufficient for approx. 1.25 m².

Sikaflex-11FC sealing compound (1756)

Elastic sealing compound with excellent strength values. Movement of approx. 10%. Fast setting, permanently elastic. Excellent weather and ageing-resistance. Resistant against aqueous detergents, sea water, lime water, weak acids and alkalis as well as public sewage. Cartridge 300 ml, sufficient for approx. 0.24 m².

Sika adhesive cleaner-1*	Article number
Type 1754, 1 litre, sufficient for 8 m ²	1 99 0 754 000 0 0
Sika primer-3 N*	Article number
Type 1755, 0.25 litre, sufficient for 1.25 m ²	1 99 0 755 000 0 0
Sikaflex-11FC ⁺ sealing compound*	Article number
Type 1756, 300 ml, sufficient for 0.24 m ²	1 99 0 756 000 0 0

*Excluded from the 25-year DOYMA warranty.

