


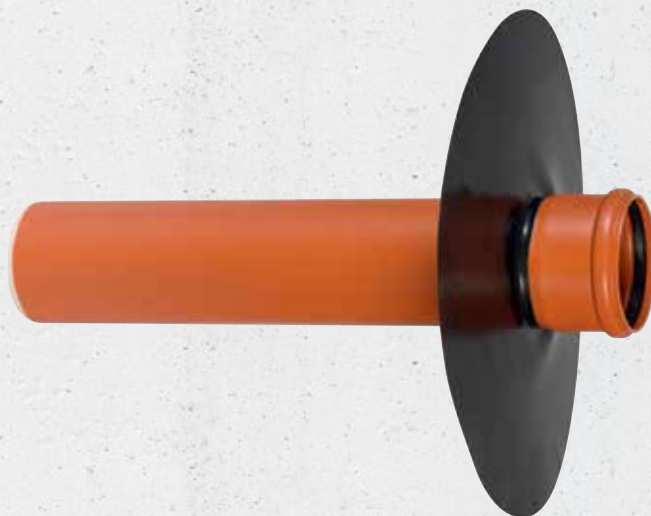
HKD KG sewer flange pipe

 NON-PRESSING WATER

- Renovation type for retrofitting in core bores of walls with tanking membranes or thick coatings (black tank)



APP-PU 50



- KG sewer flange pipe with foil flange for subsequent sealing of KG/HT pipes with tanking membranes or thick coatings
- KG sewer flange pipe is retrofitted into a suitable core bore or cut-out and the foil flange is glued to the wall
- radon proof – according to FHRK information sheet MB101
- With moulded plug-in sleeve on one side and with foil flange for connecting moisture barriers in the form of tanking membranes; diameter of foil flange 430–520 mm
- Length approx. 500 mm
- KG sewer pipes in accordance with DIN EN 13476-2

Nominal size [DN in mm]	Article number
100	8 20 0 100 500 0 1
125	8 20 0 125 500 0 1
150	8 20 0 150 500 0 1
200	8 20 0 200 500 0 1

OPTIONAL ACCESSORIES

APP-PU 50	Article number
Accessories for foil flanges	8 99 0 050 000 0 0

Further information can be found on the HKD APP-PU 50 product page.



ACCESSORIES

- One-component polyurethane sealant material APP-PU 50 with a very good adhesion to steel, plastics and concrete.

The HKD range is excluded from the DOYMA 25-year warranty.

