
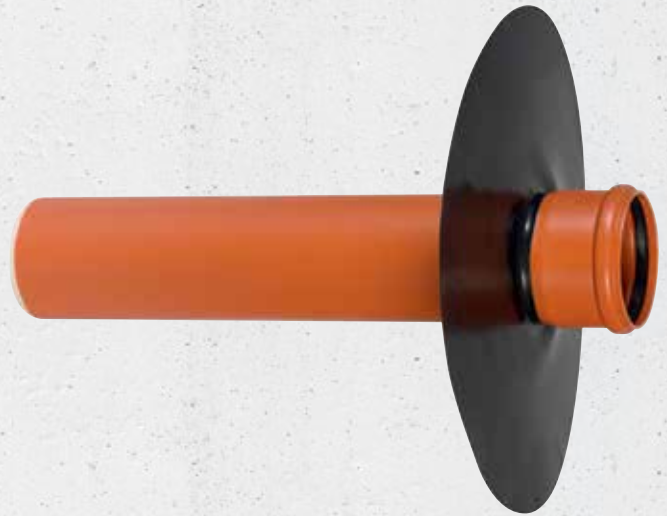


# HKD KG sewer flange pipe

 NON-PRESSING WATER

- Renovation type for **retrofitting in core bores of walls with tanking membranes or thick coatings** (black tank)



- KG sewer flange pipe with foil flange for subsequent sealing of KG/HT pipes with tanking membranes or thick coatings
- KG sewer flange pipe is retrofitted into a suitable core bore or cut-out and the foil flange is glued to the wall
- radon proof – according to FHRK information sheet MB101
- With moulded plug-in sleeve on one side and with foil flange for connecting moisture barriers in the form of tanking membranes.
- Length approx. 500 mm
- KG sewer pipes in accordance with DIN EN 13476-2

Nominal size [DN in mm]	Foil flange-OD $D_A$ [mm]	Article number
100	430	8 20 0 100 500 0 1
125	470	8 20 0 125 500 0 1
150	490	8 20 0 150 500 0 1
200	520	8 20 0 200 500 0 1

## OPTIONAL ACCESSORIES

Sikaflex-11 FC Purform	Article number
Accessories for foil flanges	1 99 0 756 000 0 0

Further information can be found on the Sikaflex-11 FC Purform product page.



### ACCESSORIES

- One-component polyurethane sealant material Sikaflex-11 FC Purform with a very good adhesion to steel, plastics and concrete.

The HKD range is excluded from the DOYMA 25-year warranty.

