


UGA BKD 150 flange sleeve

Including blind caps that are leak-tight against
pressing water



- Use in unfinished structures to be made from waterproof concrete (white tank)
- With bayonet closure



PRODUCT ADVANTAGES

- Quick and easy installation
- Leak-tight against gas and pressing water immediately after installation due to blind cap
- Permanently reliable sealing
- Versatile variants and connection options thanks to precisely fitting system caps and inserts
- Bundling possible thanks to easy combination of flange sleeves
- No reworking required
- Special version for twin/element walls


TECHNICAL DETAILS

- Single flange sleeves applicable for 50–500 mm wall thickness
- Double flange sleeves applicable for 100–500 mm wall thickness
- Application for wall thicknesses over 500 mm possible

PRODUCT SCOPE


- For holding system caps with water pressure tight blind cap with protective film
- The flange sleeve has a sealing system. This ensures an absolute leak-tight connection to the concrete.

BUNDLING

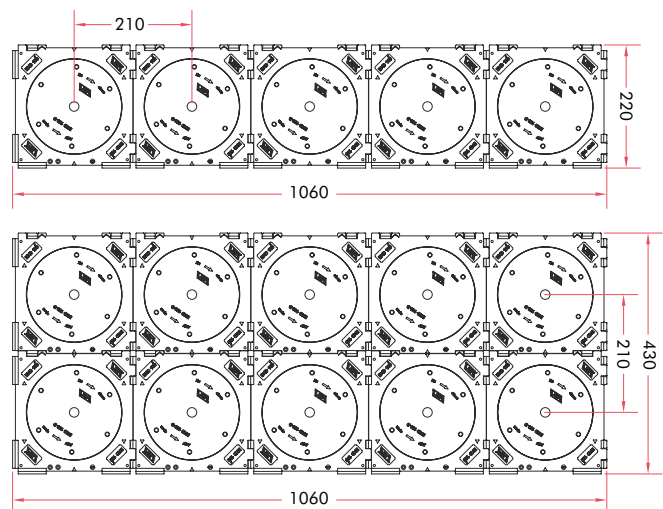

Angular flange sleeve

Suitable for cables laid at an angle of 30°, 45° or 60° coming from any direction. With auxiliary frame and styrofoam wedge. Single or double flange sleeve available. Minimum wall thickness is 250 mm.



The UGA range is excluded from the DOYMA 25-year warranty.



Product		Article number
BKD150-K/150	Single flange sleeve for wall thicknesses up to 500 mm	4 01 1 150 150 0 4
BKD150-K/200		4 01 1 150 200 0 4
BKD150-K/250		4 01 1 150 250 0 4
BKD150-K/300		4 01 1 150 300 0 4
BKD150-K/400		4 01 1 150 400 0 4
BKD150-K/500		4 01 1 150 500 0 4
BKD150-K2/150	Double flange sleeve for wall thicknesses up to 500 mm	4 02 1 150 150 0 4
BKD150-K2/200		4 02 1 150 200 0 4
BKD150-K2/250		4 02 1 150 250 0 4
BKD150-K2/300		4 02 1 150 300 0 4
BKD150-K2/400		4 02 1 150 400 0 4
BKD150-K2/500		4 02 1 150 500 0 4
BKD150-K2-EW/150	Double flange sleeve for twin/element walls with thicknesses up to 500 mm	–
BKD150-K2-EW/200		–
BKD150-K2-EW/250		–
BKD150-K2-EW/300		–
BKD150-K2-EW/400		–
BKD150-K2-EW/500		–

Article	Angle
Angular single sealing collar	
BKD150-K-S30/(L)	30°
BKD150-K-S45/(L)	45°
BKD150-K-S60/(L)	60°
Angular double sealing collar	
BKD150-K2-S30/(L)	30°
BKD150-K2-S45/(L)	45°
BKD150-K2-S60/(L)	60°

The distances of the auxiliary frame must be taken into account when bundling items one on top of the other.