


# Quadro-Sicura® E-S

for building with basements

PRESSING WATER

- Single-compartment house lead-in **with sealing on both sides**
- Use in **on-site casing** or **waterproof concrete core bore** (white tank)
- For the building service gas
- **Without jacket pipe connection**

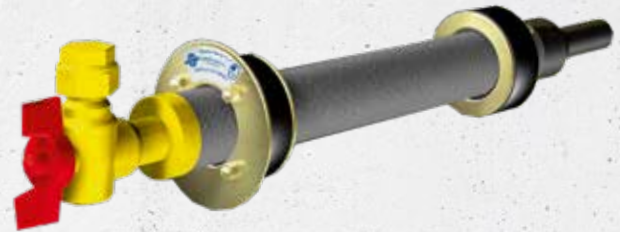

25 years guarantee

## PRODUCT ADVANTAGES

- No additional mechanical fastening required
- Leak-tight against gas and pressing water
- Permanently sealed – no need to re-tension later (maintenance-free)
- Weather-proof installation

## TECHNICAL DETAILS

- DVGW-approved (RMA, Schuck and VAF-Voigt)
- Extraction and torsion safety in accordance with DVGW VP 601
- Installation optionally in accordance with DIN 18195/ DIN 18533

## THE HOUSE LEAD-IN CONSISTS OF:

- one gasket insert with large ring, mounted inside the basement, and one gasket insert, mounted in the outer area of the building wall



Quadro-Sicura® E-S installation situation

Gas house lead-in type	DN [mm]	Core bore/casing [DN in mm]	Wall thicknesses [mm]
RMA	25	100	≥ 90
	32–DN 50	150	≥ 140
Schuck	25	125	≥ 180
	32–DN 50	150	≥ 140
VAF-Voigt	25	100	≥ 140
	50	150	≥ 140
Burger	25 and 32	100	≥ 140

Gas house lead-in	DN gas house lead-in	DN casing/core bore	Article number
For RMA gas house lead-in	DN 25	100	2831 000 000 00
	DN 32–40	150	2831 000 018 00
	DN 50	150	2831 000 022 00
For Schuck gas house lead-in	DN 25	125	2832 000 000 00
	DN 40	150	2832 000 017 00
	DN 50	150	2832 000 023 00
For VAF-Voigt gas house lead-in	DN 25	100	2833 000 000 00
	DN 50	150	2833 000 024 00
For Burger gas house lead-in	DN 25 and DN 32	100	2834 000 000 00

Prices do not include fixtures and pipes.