Curaflex® A/M

NON-PRESSING WATER

- Sealing of duct systems
- Installation in pre-installed pipe sleeve or core bore in waterproof concrete (white tank)
- For multiple pipes and cables

DOYMA GRIP · FHRK QUALITY · RADON TIGHT IAF GmbH · 25 years guarantee

PRODUCT ADVANTAGES

- Permanently sealed – no need to re-tension later (maintenance-free)
- Greater sealing performance of the gasket insert thanks to DOYMA-Grip
- System component, without cuts or divisions, with watertight welded bolts

TECHNICAL DETAILS

- Certified under FHRK test regulation GE 101 (no. G 30 322-2-1) – FHRK 27 D01
- Gas and watertight
- Radon-tight – according to FHRK information sheet MB101 meets the requirements for radon precautionary areas
- Bending of medium pipes up to 8° is possible
- Can accommodate axial movements
- Single sealing

THE GASKET INSERT CONSISTS OF:

- **Frame rings:** steel rings, GGV triple corrosion protection coating; optionally made of stainless steel 1.4301 (V2A) or 1.4571 / 1.4404 (V4A)
- **Rubber seal:** elastomer, 27 mm thick EPDM seal (DOYMA-Grip), optional EPDM-TW, NBR (fuel/oil-resistant) or silicone (high temperature-resistant) or FPM (chemical-resistant)

ACCESSORIES (OPTIONAL)*

- Aquagard core bore sealant

* see corresponding section

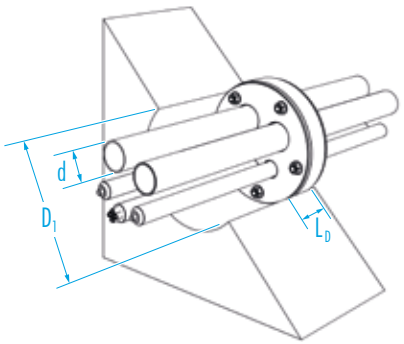

Subject to technical changes. Some illustrations include accessories.
M-MT.I-903-01/2026

Curaflex® A/M

Outer diameter of pipe / cable* d [mm]	Number of pipes and cables	Inner diameter of pipe sleeve / core bore D_1 [DN in mm]
5 – 14	1 – 2	50 (49 – 53)
5 – 26	1 – 2	80 (79 – 83)
5 – 23	1 – 3	
5 – 24	1 – 4	
5 – 16	1 – 7	
1 x 5 – 32 / 1 x 5 – 14	1 – 2	
4 x 5 – 28 / 1 x 5 – 12	1 – 5	100 (99 – 104)
5 – 21	1 – 7	
5 – 37	1 – 2	
5 – 33	1 – 3	
1 x 5 – 46 / 1 x 5 – 16	1 – 2	
5 – 36	1 – 4	125 (124 – 128)
2 x 5 – 34 / 2 x 5 – 42	1 – 4	
5 – 28	1 – 7	
5 – 41	1 – 3	
2 x 23 – 51 / 2 x 8 – 36	1 – 4	150 (149 – 153)
2 x 30 – 58 / 2 x 13 – 41	1 – 4	
4 x 22 – 50 / 1 x 5 – 16	1 – 5	
5 – 20	1 – 13	
6 x 8 – 36 / 2 x 5 – 16	1 – 8	
43 – 71	1 – 3	200 (199 – 204)
5 x 23 – 51 / 1 x 5 – 31	1 – 6	
2 x 28 – 56 / 2 x 54 – 82	1 – 4	
40 – 69	1 – 4	
5 – 36	1 – 10	
5 – 26	1 – 15	
8 x 13 – 41 / 4 x 5 – 30	1 – 12	
5 – 26	1 – 20	250 (247 – 253)
12 – 40	1 – 8	
10 x 16 – 44 / 5 x 5 – 36	1 – 15	
L_D (max. design length) [mm] 55		

*The precise outer diameter and number of pipes and cables must be specified in your order. Further dimensions available upon request. No article numbers.

Subject to technical changes. Some illustrations include accessories. M-MT1-903-01/2026